

Compliance Tips


Achieving Compliance in AS1428 Applications

A kerbrail system is required on ramps and their intermediate landings;

- whenever the ramp is deemed public access
- or otherwise required.

There are many guidelines that need to be followed for a compliant kerbrail system. The most important guidelines for compliant kerbrails in AS1428 applications are listed below;

- Kerbrails are required on both sides of a ramp, however if one side or both are solid walls, then no kerbrail is required on these walls.
- The height of the top of the kerbrail shall not be within the range of 75mm to 150mm above the finished floor.
- The maximum gap allowed between the very bottom of the kerbrail and the finished floor is 75mm.
- The ramp-side face of the kerbrail is to be flush with the ramp-side face of the handrail OR no greater than 100mm behind the ramp-side face of the handrail. A kerbrail that protrudes past the ramp-side face of the handrail is deemed non-compliant to AS1428.

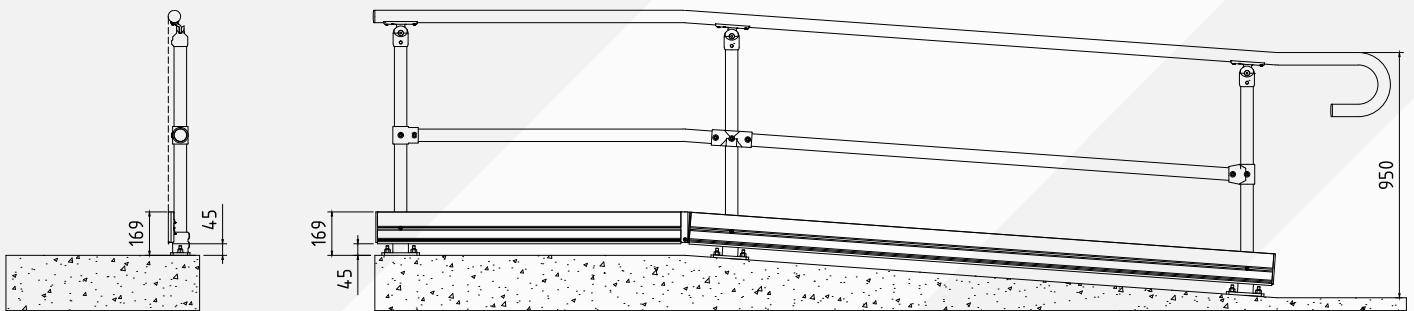

Moddex Flexalyte Kerbrail CAD drawing
Demonstrating compliance with AS 1428

Moddex Flexalyte Kerbrail systems comply with all AS1428 requirements.

Available off-the-shelf for immediate flat pack delivery across Australian and New Zealand.