


Hot Design Tips


For easy top & wall mounted handrail compliance on stairs

Top mounted Handrails such as AR10, AR45 or CB30 used on stairs, require a substrate width of 1150+mm to meet the minimum 1000mm clear between rails requirement of AS 1428 & NCC/BCA. Space permitting, a substrate design width of 1200mm+ to achieve compliance & allow for stanchions to be placed 75mm in from edge of concrete is ideal.

(See Section A)

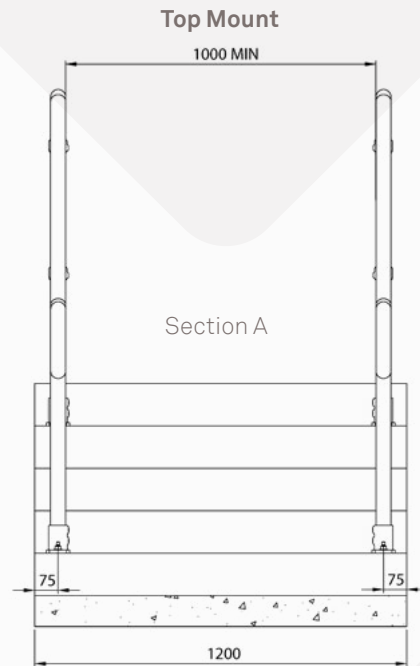

Wall Mount

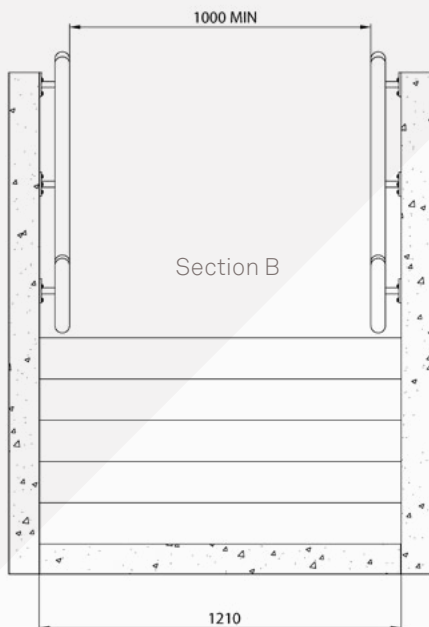

Wall mounted Handrails such as AR150, used on stairs, require a substrate width of 1210+mm to meet the minimum 1000mm clear between rails requirement of AS 1428 & NCC/BCA.

(See Section B)