


PVC Hazard & Directional Tactile Indicators

Provide walkway or directional guidance for the blind or visually impaired

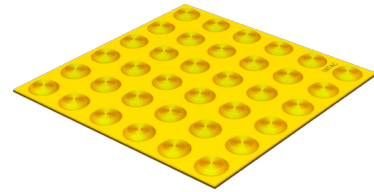

Key features

- > UV resistant PVC options available
- > PVC Series designed for 'Easy Peel & Stick' installation
- > UV stable material and non-slip top surface
- > Suitable for interior and exterior applications
- > For new projects, retrofitting or upgrades
- > Conforms with AS/ NZS 1428.4.1:2009

Applications suited to

- > DDA access ramps and stairs
- > Public walkways and thoroughfares
- > Railway platforms and traffic crossings
- > Escalators, shopping centres & car parks
- > Sports and recreation centres

Specification Summary

Supply and install the proprietary Intac Tactile Ground Surface Indicators to substrate according to the recommended installation procedures, fixings and adhesive methods of Moddex.

Technical Data

PVC Hazard Tactile Indicator Types

IN100	Silver (Luminance - 47) 300 x 300mm
IN101	Black (Luminance - 5) 300 x 300mm
IN102	White (Luminance - 83) 300 x 300mm
IN103	Yellow (Luminance - 58) 300 x 300mm
IN104	Blue (Luminance - 12) 300 x 300mm
IN105	Red (Luminance - 47) 300 x 300mm
IN106	Beige (Luminance - 43) 300 x 300mm
IN107	Grey (Luminance - 26) 300 x 300mm
IN108	Green (Luminance - 16) 300 x 300mm
IN109	Gold (Luminance - 30) 300 x 300mm

PVC Directional Indicator Types

IN150	Silver 300 x 150mm
IN151	Black 300 x 150mm
IN152	White 300 x 150mm
IN153	Yellow (Luminance - 34) 300 x 150mm
IN154	Blue 300 x 150mm
IN155	Red 300 x 150mm
IN156	Beige (Luminance - 58) 300 x 150mm
IN157	Grey (Luminance - 38) 300 x 150mm
IN158	Green 300 x 150mm
IN159	Gold 300 x 150mm

Dimensions

Maximum height of indicator	5mm
Overall width	300mm

Install Method

Dry lay the tiles to ensure that are in the correct place and lie flat on the substrate. Peel the backing sheet from tile and apply to the surface. Once all tiles have been laid, press down firmly to ensure there is good bond to the surface.

Compliance

Intac is designed and manufactured in accordance with requirements of Australian Standard AS1428.4.1:2009 and relevant statutory OHS Codes of Practice/Guidelines.

Testing

Testing and performance based on requirement of Australian Standard AS 1428.4.1:2009.

Warranty

1 year from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations, unless otherwise negotiated at the time of purchase.

— Refer maintenance manual

Inspection & Maintenance


Visual inspection for any damage or loose fixings must be done periodically and prior to use. No certified maintenance required. Intac Tactile are low maintenance items which only require general surface cleaning to maintain optimum performance, appearance and longevity.

Remove surface soil deposits by brushing or vacuuming, and remove stains and gum using non-acid based reputable solvents.

In external applications, care should be taken when cleaning pavers or other external finished to ensure that acid cleaners do not come in contact with the tactile ground surface indicators. If preferred a jet wash method of cleaning is suitable.

— Refer maintenance manual

Technical Information

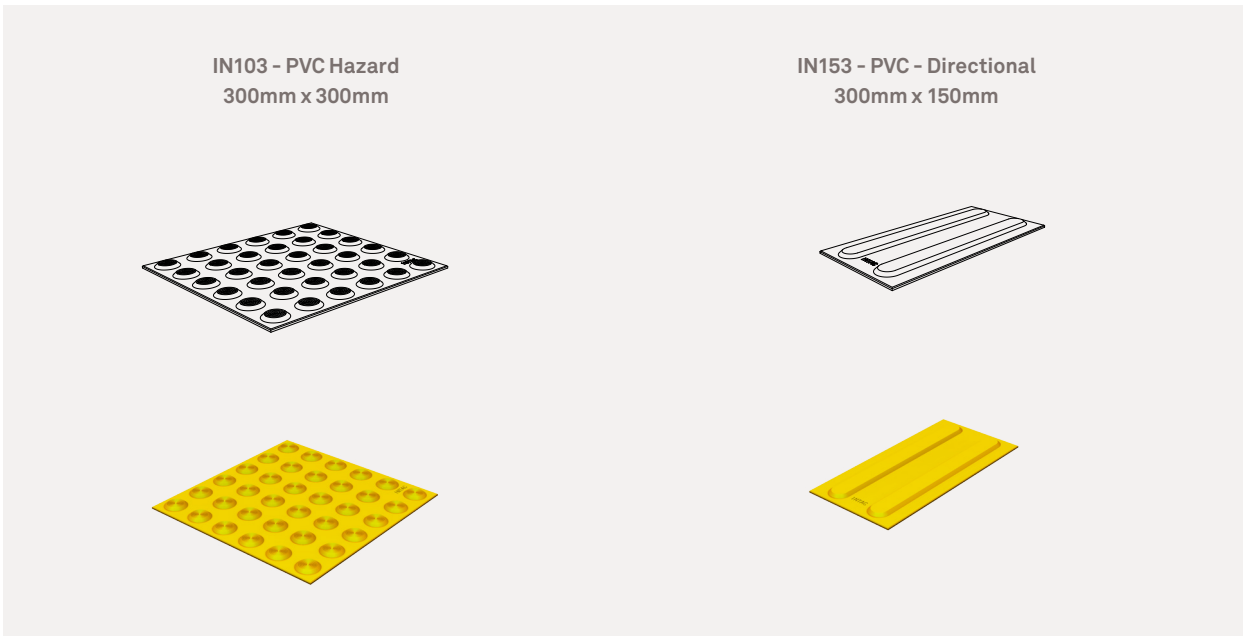

Standard References

Extract from Australian Standard AS/NZS 1428.4:2009

2.4 STAIRWAYS, RAMPS, ESCALATORS AND MOVING WALKS

Where required on a path of travel, warning indicators shall be located at both the top and bottom of stairways, ramps, escalators and moving walks, as shown in Figures 2.2(A), 2.2(B), 2.3(A), 2.3(B) and 2.4.

2.5 PEDESTRIANS AND VEHICLES AT THE SAME GRADE

Where a pedestrian area joins a carriageway at grade (i.e. on the same level) or to delineate the pedestrian area from the carriageway, TGSIs shall be provided in accordance with Figures 2.5(A) and 2.5(B).

2.6 WARNING OF HAZARDS WITHIN THE CIRCULATION SPACE, OR ADJACENT TO A CONTINUOUS ACCESSIBLE PATH OF TRAVEL

Where there are impediments or hazards with less than 2000 mm clearance in an accessible open public space with no clearly defined continuous accessible path of travel (e.g., areas under a stairway, escalator or moving walkway), contact with overhead hazard shall be prevented by a suitable barrier such as—

- (a) enclosing the area; or
- (b) providing handrails with kerbs or kerb rails in accordance with AS/NZS 1428.1,

In the absence of a suitable barrier, TGSIs shall be installed as shown in Figures 2.6(B).