# AR130 Assistrail Public Access Handrail Specifications

# Twin Offset Handrail

For the centre of a wide stair





# Z L

#### **Key features**

- > Modular flexibility
- No-weld assemblyFlat pack delivery
- Flat pack delivery
  Reduced corrosion
- > Colour options
- > Available ex-stock
- > BIM & CAD Support

#### Applications suited to

- > DDA access ramps and stairs
- > Fire and access stairs
- > Aged care and accommodation
- > Hospitals, schools, universities
- > Public transport and sightseeing> Community and recreation centres

#### **Specification Summary**

Supply and install the proprietary AR130 handrail system to substrate according to Moddex specifications, or by a Moddex accredited installer.

# Technical Data

Material

Stanchions & railsSteel/grade C250 & 350	
Clamp fittings	Malleable Cast iron
Clamp locking screws	Stainless Steel (304)

#### Protective coating

	0
Stanchions & railsG390 Hot Dip Galvanized (min 390g/m²)	
Clamp fittings	Hot-dip Galvanized with patented protective coating on threads
Optional	Powder coating and paint specs*

\*The standard process for Powder Coated and Painted handrail products is as follows: black steel is used for fabrication and then hot-dipped galvanized. Product is then de-gassed and pre-treated before powder coating is applied on top of galvanising.

#### **Dimensions**

Variable depending on building/application/code

#### Stanchions

Diameter	48.3mm OD 41.9mm ID	
Nominal Thickness	3.2mm	

#### Rails

Diameter	48.3mm OD 41.9mm ID
Nominal Thickness	3.2mm

### Clamp fittings

Thickness	5.0mm (approx)
Locking screws	M12 x 1.75 x 11mm - DEXX <sup>®</sup> Drive

#### Weight

Variable depending on building/application/code

Stanchion with clamps	7.2 to 8.0kg
Rail @ 6.0m	21.6kg

#### **Fixings**

Stanchion attachment to

Concrete	M12 galvanized mechanical concrete anchor
Structural steel	M16 galvanized high tensile bolt set

#### Compliance

Moddex AR130 handrails are designed and manufactured in accordance withthe New Zealand Building Code D1 Access Routes and NZS 4121:2001.

Galvanized to AS 4792 and AS/NZS 4680:2006 (where applicable).

#### **Testing**

Testing and performance based on requirement of Australian & New Zealand Standard AS1170.1 Clause 3.6 Table 3.3. Stringent vibration endurance tests have been performed.

#### Warranty

5 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations, unless otherwise negotiated at the time of purchase.

— Refer maintenance manual

#### **Inspection & Maintenance**

Visual inspection for any damage or loose fixings must be done periodically and prior to use. No certified maintenance required. Basic wear and tear preventative maintenance is recommended, as per manufacturer's specifications and recommendations.

— Refer maintenance manual

#### **Basis of Design**

When designed as per the Moddex PS1


- 1. Design Life: 50 years minimum
- 2. Building Occupancy: B, E
- 3. Loading: AS/NZS 1170.1:2002 TABLE 3.3 AS 1657: 2013 CL6.1
- 4. Live Loading: Line: 0.35kN/m Concentrated: 0.6kN Infill: N/A

#### BPIR

BPIR, set new minimum requirements for the level of information required about building products supplied to the New Zealand market. Moddex is committed to meeting these requirements - download the latest information here:

 $\underline{\text{https://moddex.com/resources/downloads/\#bpir-sheets}}$ 

#### **Technical Information**

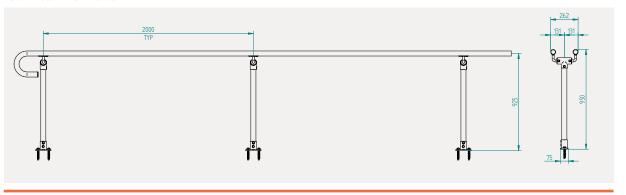


#### **Mount Dimensions**

#### **FIXING TO CONCRETE**

T2 - Top Mount (2 Fixings)








MD134.48









FIXING TO STEEL

T2 - Top Mount (2 Fixings)

MD232.48




F2 - Face Mount (2 Fixings)



MINIMUM EDGE DISTANCE

T4 - Top Mount (4 Fixings)




FIXING TO TIMBER

T4 - Top Mount (4 Fixings)



F4 - Face Mount (4 Fixings)



#### **Standard References**

#### New Zealand Building Code

As noted in NZBC Clause D1 Access Routes, handrails shall be provided on both sides of accessible stairways and accessible ramps.

## New Zealand Standard 4121:2001

- 8.3 Stair Design
- Figure 22
- Figure 23

# DOWNLOAD OUR GUIDE TO HANDRAIL & BALUSTRADE COMPLIANCE HERE

Important Note: Failure to supply and/or install proprietary product in accordance with above Standards and codes, specification and instructions, voids complete system certification and/or warranty.

Designed and manufactured by Moddex Systems. @Moddex Group. All Rights Reserved.

For information or technical support please contact us

- T 1800 663 339 (AU)
- T 0800 663 339 (NZ)